MOBI CARE BASIN MIXER, WT 6661D

Before you install.

Read this page before you begin. Failure to comply with any of the requirements below will void all warranties.

PRESSURE	HOT WATER MAX	DECK THICKNESS	TAP HOLE
150 to 500kPa	70°C	40mm max	Ø34 to 36mm

INSTALLER	The mixer must be installed by a qualified plumber. Keep a certificate of compliance with the installer's details and the receipt of purchase for any warranty claim.
BEFORE INSTALLING	Flush all pipework leading to the mixer. Fit isolating stop taps to both the hot and cold supplies in accordance with AS3500.
WATER PRESSURE	Hot and cold pressures must be equal. The maximum operating pressure is 500kPa. Fit an approved pressure reducing valve if the supply is higher.
WATER TEMPERATURE	The maximum hot water temperature is 70°C. Fit an approved water tempering valve if the supply is hotter.
HOSES	Hoses must not be twisted, stretched or under tension. Do not bend them to a radius of less than 25mm.
MOUNTING	Deck thickness is 40mm maximum. The tap hole must be Ø34 to 36mm.

NOT SUITABLE FOR GRAVITY FEED

FAILURE TO COMPLY WITH ANY OF THE ABOVE WILL VOID ALL WARRANTIES

ADDRESS
42 Castro Way, Derrimut VIC 3026

PHONE
(03) 8390 6300

EMAIL
sales@zenmo.com.au

WEBSITE
www.zenmo.com.au

MOBI CARE BASIN MIXER, WT 6661D


Installing the mixer.

01	Flush all pipework. Fit the O-ring washer into the groove in the base of the mixer.
02	Fit the hoses to the mixer and tighten by hand only. A red band marks the hot hose and a blue band marks the cold hose.
03	Pass the hoses through the tap hole and fit the mixer body in the hole.
04	Place the horseshoe or round washer on the mounting plate, onto the mounting bolt.
05	Tighten the mounting nut from underneath.
06	Connect the hoses to the isolating stop taps. Hoses must not be kinked, twisted or under tension.
07	Turn on the isolating stop taps and check for leaks.

THE MIXER



DIMENSIONS, MM

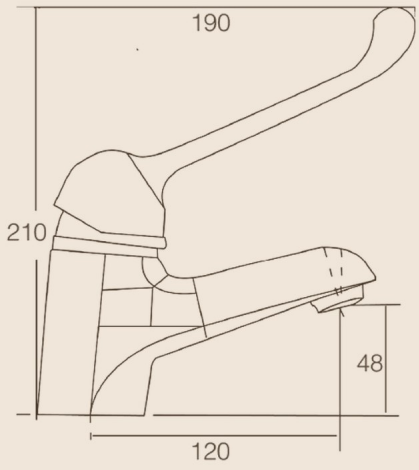

DO NOT USE A SPANNER ON THE HOSE CONNECTIONS

A spanner can damage the O-ring. Tighten the hoses by hand only.

ADDRESS
42 Castro Way, Derrimut VIC 3026

PHONE
(03) 8390 6300

EMAIL
sales@zenmo.com.au

WEBSITE
www.zenmo.com.au

MOBI CARE BASIN MIXER, WT 6661D

Replacing the cartridge.

01	Turn off the water supplies to the mixer.
02	Remove the screw plug and loosen the grub screw. Remove the handle, unscrew the dress ring, remove the lock nut and lift out the old cartridge.
03	Clean the body and check the seal. Fit the new cartridge with the two lugs in the mating holes.
04	Tighten the lock nut to 12Nm. Replace the dress ring and tighten it by hand.
05	Refit the handle and the screw plug.
06	Turn on the water supplies and check the operation of the mixer.

THE MIXER



LOCK NUT TORQUE

12 Nm

Tighten the lock nut to this torque, then replace the dress ring and tighten it by hand.

ADDRESS
42 Castro Way, Derrimut VIC 3026

PHONE
(03) 8390 6300

EMAIL
sales@zenmo.com.au

WEBSITE
www.zenmo.com.au