
BOTTLE TRAP, TP B/TRAP32/40

Installing the bottle trap.


STEP 01

To calculate the length of the outlet pipe, fit the pre-assembled bottle trap to the basin and measure from the bottle trap shoulder (A) to the elbow coupling (B). Add 30mm for the internal pipe connection. (Pic A)

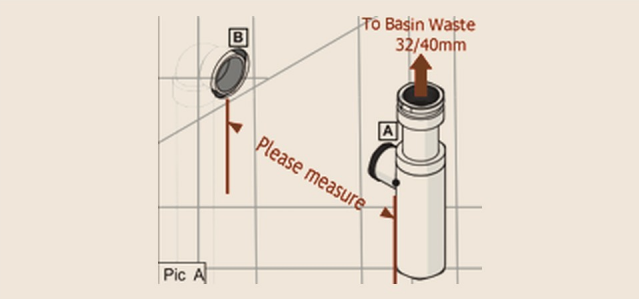


STEP 02

Cut the outlet pipe to the calculated length and remove all swarf from the end of the pipe. (Pic B)

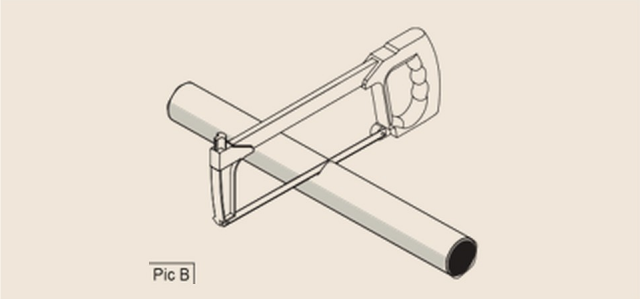


STEP 03

Once the bottle trap is removed from the basin and the seals are lubricated, slide the outlet pipe into the bottle trap shoulder and tighten it with the outlet retaining nut. (Pic C)

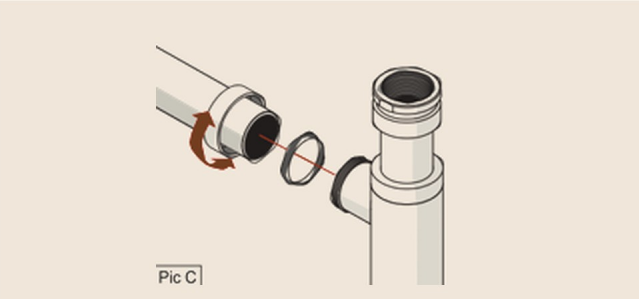


STEP 04

Slide the cover plate and rubber seal onto the outlet pipe. (Pic D)

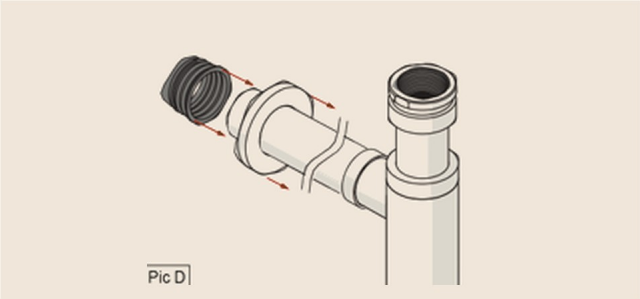

STEP 05

Lubricate the rubber seal and push-fit the bottle trap and outlet pipe assembly into the PVC straight coupling (not supplied). (Pic E) Fit the bottle trap to the basin waste, making sure the height is adjusted to allow fall of water. Test that the fittings are secure and the bottle trap is water tight.

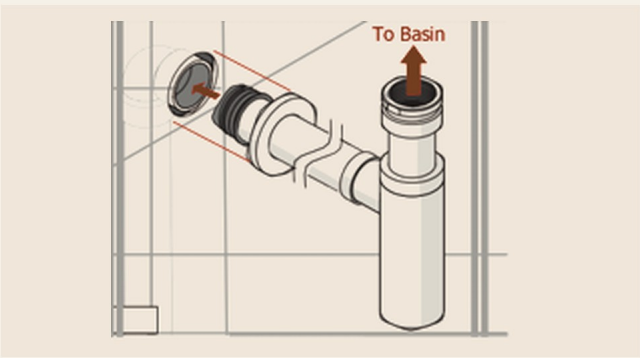

ADDRESS
42 Castro Way, Derrimut VIC 3026

PHONE
(03) 8390 6300

EMAIL
sales@zenmo.com.au

WEBSITE
www.zenmo.com.au